

PROLINE® Type 12 Voice/Data and Server Cabinets

**Bulletin
DPSR**



Standard Cabinet

AC Ready Cabinet

- AC package has cutout for easy in-the-field installation of any CR29 series air conditioner (shipped separately)
- Models available with EIA Universal standard 3/8 in. square or 10-32 tapped holes
- Mobile base includes casters, levelers, and gland plate
- Gland plate allows easy routing of cable

Finish

Phosphatized steel coated with RAL 9005 black or RAL 7035 light gray textured, low gloss polyester powder paint. Other finishes available - contact Hoffman Customer Service.

Industry Standards

EIA RS-310-D
UL 508A, File Number E61997, Type 12
cUL C22.2 No. 94, File Number E61997, Type 12
NEMA/EEMAC, Type 12

Load Rating

Static load rating 1500 lb (680.4 kg). For other load requirements, contact Hoffman.

Accessories

See the Package Components table and, for AC Ready Cabinet, CR29 air conditioner specifications in the Hoffman Specifier's Guide, Thermal Management chapter. Air conditioner will be shipped separately. It cannot be factory installed.

Application


These cabinets house data equipment in dusty and dirty environments. They are sealed against dripping water and dust and prevent air exchange. These cabinets are ideal to house and protect sensitive electronic equipment in an uncontrolled indoor environment.

Features

- Three-point locking handles on all doors provides easy but controlled access. Two keys included.
- Fully welded frame safely supports sensitive equipment
- Fully gasketed to keep contaminants away from equipment, reducing maintenance costs
- Two sets of 19 in. rack angles support both front and rear of equipment
- Rack angles are infinitely adjustable from front to rear for positioning flexibility
- Mobile base provides easy placement of cabinet
- Levelers and anti-tip bracket secure cabinet to the floor

Construction

- Welded 12 gauge steel frame with integral struts
- Front window door made with 16 or 14 gauge steel and safety glass window
- Solid 16 or 14 gauge steel back door
- Standard package has solid 16 or 14 gauge steel sides

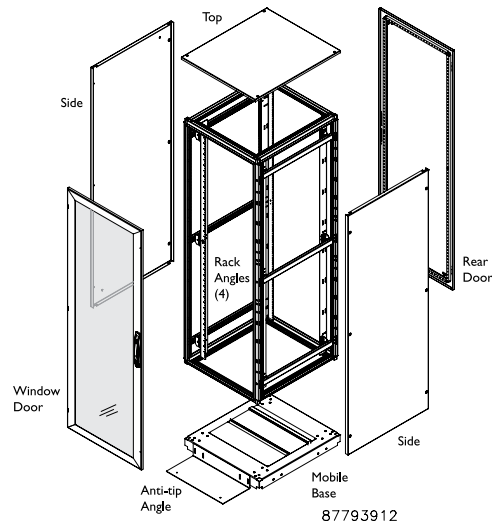

DataCom Products

Standard Sizes PROLINE® Type 12 Voice/Data and Server Cabinets

Package Type	RAL 9005 Black Catalog Number	RAL 7035 Light Gray Catalog Number	Nominal Size	Rack Units	B		C		Rack Angle Catalog Number	Hole Type
					mm	in.	mm	in.		
Standard Voice Data	PDCP2078B12	PDCP2078G12	2000 x 700 x 800	42	708	27.87	846	33.31	PRA1920TPL1	Tapped
Standard Server	PSC20610B12	PSC20610G12	2000 x 600 x 1000	42	608	23.94	1046	41.18	PRA1920THL1	Square
AC Ready Voice Data	PDCP2078BAC	PDCP2078GAC	2000 x 700 x 800	42	708	27.87	846	33.31	PRA1920TPL1	Tapped
AC Ready Server	PSC20610BAC	PSC20610GAC	2000 x 600 x 1000	42	608	23.94	1046	41.18	PRA1920THL1	Square